

| | | |
|--|---|--|
| Form PTO 1390 U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE (REV 5-93) | | ATTORNEY'S DOCKET NUMBER C70361 |
| TRANSMITTAL LETTER TO THE UNITED STATES DESIGNATED / ELECTED OFFICE (DO/EO/US) CONCERNING A FILING UNDER 35 U.S.C. 371 | | U.S. APPLICATION NO. (If known, see 37 C.F.R. 1.5) 09/762022 |
| INTERNATIONAL APPLICATION NO PCT/EP99/05582 | INTERNATIONAL FILING DATE 02 August 1999 | PRIORITY DATE CLAIMED 05 August 1998 |
| TITLE OF INVENTION TOOTHBRUSH | | |
| APPLICANT(S) FOR DO/EO/US MULLER, Werner | | |

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:

1. ☒ This is a **FIRST** submission of items concerning a filing under 35 U.S.C. 371.
2. ☐ This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 U.S.C. 371.
3. ☒ This express request to begin national examination procedures (35 U.S.C. 371(f)) at any time rather than delay examination until the expiration of the applicable time limit set in 35 U.S.C. 371(b) and PCT Articles 22 and 39(1).
4. ☒ A proper Demand for International Preliminary Examination was made by the 19th month from the earliest claimed priority date.
5. ☒ A copy of the International Application as filed (35 U.S.C. 371(c)(2))
 - a. ☐ is transmitted herewith (required only if not transmitted by the International Bureau).
 - b. ☒ has been transmitted by the International Bureau.
 - c. ☐ is not required, as the application was filed in the United States Receiving Office (RO/US).
6. ☐ A translation of the International Application into English (35 U.S.C. 371(c)(2)).
7. ☒ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3))
 - a. ☐ are transmitted herewith (required only if not transmitted by the International Bureau).
 - b. ☒ have been transmitted by the International Bureau.
 - c. ☐ have not been made; however, the time limit for making such amendments has NOT expired.
 - d. ☐ have not been made and will not be made.
8. ☐ A translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).
9. ☐ An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)).
10. ☐ A translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)).

Items 11. to 16. below concern other document(s) or information included:

11. ☒ An Information Disclosure Statement under 37 C.F.R. 1.97 and 1.98.
12. ☐ An assignment document for recording. A separate cover sheet in compliance with 37 C.F.R. 3.28 and 3.31 is included.
13. ☒ A FIRST preliminary amendment.
14. ☐ A SECOND or SUBSEQUENT preliminary amendment.
15. ☒ Please amend the specification by inserting before the first line the sentence: This is a 371 of International Application PCT/EP99/05582 filed 2 August 1999, which claims benefit from the following Provisional Application GB 9816914.7, filed 5 August 1998.
16. ☐ A substitute specification.
17. ☐ A change of power of attorney and/or address letter.
18. ☐ An Abstract on a separate sheet of paper.
19. ☐ Other items or information:

| | | | | | |
|---|--------------|---|-------------|--------------------------------|-----------------|
| US APPLICATION NO. (if known see 37 CFR 1.50) 09/762022 | | INTERNATIONAL APPLICATION NO. PCT/EP99/05582 | | ATTORNEYS DOCKET NO. C70361 | |
| 20. <input checked="" type="checkbox"/> The following fees are submitted: | | | | CALCULATIONS PTO USE ONLY | |
| Basic National Fee (37 C.F.R. 1.492(a)(1)-(5)): | | | | | |
| Search Report has been prepared by the EPO or JPO\$860.00 | | | | | |
| International Preliminary Examination Fee paid to USPTO (37 CFR 1.482)\$690.00 | | | | | |
| No International Preliminary Examination Fee paid to USPTO (37 CFR 1.482) but international search fee paid to USPTO (37 CFR 1.445(a)(2))\$710.00 | | | | | |
| Neither International Preliminary Examination Fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO.....\$1,000.00 | | | | | |
| International Preliminary Examination Fee paid to USPTO (37 CFR 1.482) and all claims satisfied provisions of PCT Article 33(2)-(4).....\$100.00 | | | | | |
| ENTER APPROPRIATE BASIC FEE AMOUNT = | | | | \$860.00 | |
| Surcharge of \$130.00 for furnishing the oath or declaration later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(e)). | | | | \$0.00 | |
| Claims | Number Filed | Number Extra | Rate | | |
| Total claims | 17- 20 = | 0 | 0 x \$18.00 | \$0.00 | |
| Independent claims | 3 - 3 = | 0 | 0 x \$80.00 | \$0.00 | |
| Multiple dependent claims (if applicable) | | | + \$270.00 | \$0.00 | |
| TOTAL OF ABOVE CALCULATIONS = | | | | \$860.00 | |
| Reduction by 1/2 for filing by small entity, if applicable. Verified Small Entity statement must also be filed. (Note 37 CFR 1.9, 1.27, 1.28). | | | | \$ | |
| SUBTOTAL = | | | | \$0.00 | |
| Processing fee of \$130.00 for furnishing the English translation later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(f)) + | | | | \$ | |
| TOTAL NATIONAL FEE = | | | | \$860.00 | |
| | | | | Amount to be refunded | \$ |
| | | | | charged | \$860.00 |

- a. ☐ A check in the amount of \$_____ to cover the above fees is enclosed.
- b. ☒ Please charge my Deposit Account No. 19-2570 in the amount of **\$860.00** to cover the above fees. A duplicate copy of this sheet is enclosed.
- c. ☒ The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment to Deposit Account No. 19-2570. A duplicate copy of this sheet is enclosed.
- d. ☒ General Authorization to charge any and all fees under 37 CFR 1.16 or 1.17, including petitions for extension of time relating to this application (37 CFR 1.136 (a)(3)).

NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b)) must be filed and granted to restore the application to pending status.

SEND ALL CORRESPONDENCE TO:

GLAXOSMITHKLINE

Corporate Intellectual Property - UW2220

P.O. Box 1539

King of Prussia, PA 19406-0939

Phone (610) 270-5044

Facsimile (610) 270-5090

Nora Stein-Fernandez
SIGNATURE
Nora Stein-Fernandez
NAME
36,689
REGISTRATION NO.

09/762022

JC07 Rec'd PCT/PTO 0 1 FEB 2001

Attorney Docket No: C70361

IN THE UNITED STATES INTERNATIONAL EXAMINING AUTHORITY

International Application No.: PCT/EP99/05582

International Filing Date: 02 August 1999

Priority Date Claimed: 05 August 1998

Applicants for DO/US: Werner MULLER

Title of Invention: TOOTHBRUSH

Assistant Commissioner of Patents

Box PCT

Washington D.C. 20231

PRELIMINARY AMENDMENT

Sir:

Preliminary to calculating filing fees and examining this application,
please amend the application as follows:

IN THE CLAIMS:

PLEASE AMEND THE CLAIMS AS FOLLOWS:

Claim 3, line 1, delete "or 2";

Claim 5, line 1, delete "any preceding claim" and replace with

--claim 1--;

Claim 6, line 1, delete "any preceding claim" and replace with

--claim 1--;

Claim 7, line 1, delete "any one of the preceding claims" and replace with

--claim 1--;

Claim 8, line 1, delete "any one of the preceding claims" and replace with

--claim 1--;

Claim 10, line 1, delete " any one of the preceding claims " and replace
with --claim 1--;

Claim 11, line 1, delete " any one of the preceding claims " and replace
with --claim 1--;

Claim 13, line 1, delete "or 12";

Claim 14, line 1, delete "any preceding claim" and replace with -- claim 1 --;
Claim 15, line 1, delete "any preceding claim" and replace with -- claim 1 -- ;
Claim 16, line 1, delete "any of the preceding claims" and replace with
-- claim 1 --;
Claim 17, lines 1-2, delete "any one of the preceding claims is made" and replace
with -- claim 1--;


REMARKS

This Preliminary Amendment is being made upon entry of International Application No. PCT/99/05582 into the U.S. national phase of prosecution. Claims 3, 5-8, 10-11 and 13-17 that were annexed to the International Preliminary Examination report have been amended to comply with proper U.S. claim format.

An Information Disclosure Statement accompanies this Preliminary Amendment. Applicant respectfully requests that the Examiner consider and make of record the documents cited therein and that a copy of the form PTO-1449, appropriately initialed by the Examiner, be returned to Applicant's attorney.

In view of the foregoing, favorable consideration of the amended claims, early examination on the merits and allowance of this application are respectfully solicited.

Respectfully submitted,

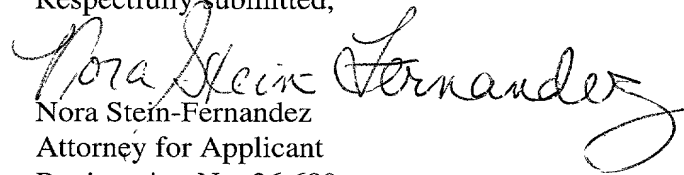
Nora Stein-Fernandez
Attorney for Applicant
Registration No. 36,689

GLAXOSMITHKLINE
Corporate Intellectual Property UW2220
P.O. Box 1539
King of Prussia, PA 19406-0939
Phone (610) 270-5044
Facsimile (610) 270-5090

n:\nsf\cpatapps\c75068\preamen.doc

Toothbrush

This invention relates to toothbrushes. In particular this invention relates to toothbrushes having means for detecting plaque and other biological deposits on the surface of teeth by directing incident radiation onto the surface of the teeth and
5 detecting fluorescence radiation emitted from the teeth in consequence.

The term "biological deposits" used herein refers generally to deposits of material of biological origin, e.g. plaque, bacteria, tartar, calculus etc. which are generally regarded as undesirable for dental hygiene. Dental plaque is a complex organic deposit generated in part by the activity of bacteria upon the teeth or upon
10 contamination, e.g. food deposits on the teeth, and is an undesirable precursor to tooth decay and the development of dental caries.

It is desirable to detect such deposits on the teeth before removing them, for example by toothbrushing, as detection indicates the areas at which dental cleaning effort should be concentrated. Such deposits can be difficult to detect in situ in vivo
15 on the teeth. It is especially important to detect dental plaque. For detection of plaque it is known to use fluorescence measurement, in which incident radiation is directed at the surfaces of teeth, and fluorescence radiation having characteristics associated with the presence of biological deposits is emitted from the teeth and is detected.

20 In the state of the art there are two general methods for detecting dental plaque, using respectively primary fluorescence in which the fluorescence of dental plaque or other dental material itself is monitored, and secondary fluorescence in which teeth suspected of bearing plaque are treated with a fluorescent label material which preferentially binds to dental plaque, and the fluorescence emission of the
25 label material at areas of the tooth at which it has bound is detected to indicate the presence of dental plaque. Patent publications WO 92/06671, WO 97/01298, US 5382163, DE 29704185, DE 29705934, EP 0774235, and also WO 97/01298 (Phillips) disclose methods of this type and devices for performing these methods. GB 9810471.4 filed on 16 May 1998 and internationally filed as PCT/EP99/03273,
30 the contents of which are included herein by way of reference, discloses a further method and apparatus for detecting biological deposits on tooth surfaces using fluorescence. One form of the apparatus disclosed in PCT/EP99/03273 comprises a

toothbrush head having a bundle of optical fibres extending through it to direct incident radiation at a test tooth surface, and to collect emitted radiation from the test tooth surface.

5 It is usually a requirement of such methods that incident radiation is directed at the surface of the teeth under examination and that consequent fluorescence emission radiation from the surface of the teeth is collected. WO 98/10711 discloses a toothbrush provided with a head which is made of a monolithic body of an optically transparent materials for the purpose of directing light towards the surfaces of the teeth. In WO 98/10711 this radiation is for the purposes of therapy not for
10 detection of biological deposits.

Those of the above-mentioned devices which are toothbrushes generally use bundles of optic fibres passing through the head and body of the toothbrush to both direct incident radiation to the head and collect emitted radiation from the head. It is an object of this invention to provide a toothbrush of the above-described type
15 having an improved means for directing incident radiation onto the surface of teeth and for collecting radiation emitted from the surface of teeth in response to the incident radiation.

According to this invention a toothbrush head is provided having a bristle surface from which a cluster of bristles extends in a bristle direction, the head being
20 suitable to direct incident radiation toward a surface of a tooth and to collect emitted radiation from the surface of the tooth,

characterised in that the means to direct incident radiation toward the surface of a tooth, and/or the means to collect emitted radiation from the surface of the tooth comprise that the head is made at least in part of a material which is
25 transparent to the incident and/or emitted radiation.

Suitably the material which is transparent to the incident and/or emitted radiation should be transparent to incident radiation in the wavelength range 400-520 nm, typically 470 ± 40 nm, and to emitted radiation in the wavelength range above ca. 520 nm, typically in the range 530-600 nm. Adding these two ranges
30 together, preferably the material is transparent over the range 400 – 630nm. Suitable transparent materials include transparent plastics materials, such as polymethylmethacrylates (PMMA), polyacrylates (PA), polycarbonates (PC),

WO 00/07482

polyethylene terephthalates (PET), polyesters, styrene acrylonitrile copolymers (SAN), polystyrenes (PS), acrylonitrile butadiene styrene (ABS), polyamide polymers (PA) such as Nylon™ type materials, and other known transparent plastics. Suitable plastics ideally should not show fluorescence or other luminescence under the influence of the incident radiation.

In general, in the toothbrush for which the toothbrush head of this invention is provided directs the incident radiation toward a surface of the tooth in a direction generally parallel to the bristle direction, and is collected in the opposite direction. Generally the incident radiation is directed toward the surface of the tooth from part of the bristle surface. This enables the toothbrush to be held and used for brushing the teeth in a manner similar to that in which a conventional toothbrush is held and used. Generally it is preferred to locate the means to generate incident radiation and / or the means to associate this emitted radiation with the presence of biological deposits on the tooth within the handle of the toothbrush. These means will generally comprise electrical systems e.g. a light emitter and detector and associated electronics. Such a location in the handle is also convenient if the toothbrush is an electrical toothbrush, i.e having electrical drive means to move the cleaning bristles in a tooth cleaning operation. Generally if the means to generate incident radiation is located in the handle of the toothbrush, this incident radiation will be initially directed through the head in a direction substantially parallel to the longitudinal axis. If, as is common in toothbrushes, the bristle direction is substantially perpendicular to the longitudinal axis it will consequently be necessary to divert the radiation from a direction substantially parallel to the longitudinal axis into a direction substantially perpendicular to the longitudinal axis, i.e. into the bristle direction, and vice versa with the emitted radiation.

In a first embodiment of this invention the head of the toothbrush may be made of a monolithic body of a material which is transparent to the incident and/or emitted radiation and may thus guide radiation transmitted internally within it.

In such a construction incident radiation may be contained within the body of material by total internal reflection caused by the difference in refractive index ("N") between the high refractive index of the mass and the lower refractive index of the surrounding air of the environment.

Suitable materials from which such a monolithic body may be constructed include the above-mentioned transparent plastics materials.

In this first embodiment the head may be shaped so that its shape diverts incident and emitted radiation in the above-mentioned manner. For example an end surface of the head remote from the handle, or intermediate surfaces located between this end surface and the handle, may be curved or may be angled relative to the longitudinal direction and bristle direction so as to reflect, refract or otherwise divert incident radiation passing in the longitudinal direction along the head into the bristle direction. Additionally or alternatively the material may be coated, either wholly or partially, with a reflective coating, e.g. a thin reflective metal layer, so as to reflect incident radiation passing in the longitudinal direction along the head into the bristle direction. The shape and size of such surfaces, and/or of the reflective coating may be used to determine the area onto which incident radiation is directed and from which emitted radiation is collected. Additionally or alternatively the material itself or the above-mentioned reflective coating may be covered with a non-transparent layer, for example to prevent loss of incident or emitted radiation, or entry of extraneous radiation. If such a toothbrush head is manufactured by the usual process of injection moulding, then care should be taken to ensure that there is no formation of cloudiness, streaks or bubbles which might interfere with the transmission of radiation through the head material.

In this first embodiment of the toothbrush head the toothbrush bristles may be fixed into the monolithic body, e.g. using known bristle fixing techniques.

In this first embodiment, particularly if the structure of the toothbrush head comprises the material which is transparent to the incident and/or emitted radiation, the head may also incorporate one or more additional radiation guiding means, for example one or more optical fibres (e.g. of known type), to direct incident and/or emitted radiation respectively to and from the tooth surface. For example one or more such means, e.g. optical fibres may extend through the bristle surface and may direct incident radiation to the tooth surface, and the transparent material may collect emitted radiation through the bristle surface. Alternatively for example the transparent material may direct incident radiation to the tooth surface, and one or more such means, e.g. optical fibres extending through the bristle surface may

collect emitted radiation. Alternatively for example such optical fibre(s) may end in the transparent material below the surface of the head, for example such fibre(s) may end below the bristle surface and facing in the bristle direction. Incident radiation may consequently pass through a transparent layer or window of the head after leaving the end of the fibre, and may then reach the tooth surface. Additionally or alternatively emitted radiation from the tooth surface may consequently pass through a transparent layer or window of the head material before reaching the end of the fibre.

In a second embodiment of this invention the head of the toothbrush comprises one or more cores of a material which is transparent to the incident and/or emitted radiation, which may guide radiation transmitted internally within it, and having a refractive index N_1 , the core being surrounded by a sheath which is also of material which is transparent to the incident and/or emitted radiation, the sheath having a refractive index N_2 , N_1 being greater than N_2 , such that internal reflection occurs as a result of the difference in refractive index between N_1 and N_2 to direct radiation within the core.

Generally any difference between the refractive index of the core and a surrounding sheath of a transparent material can result in internal reflection within the core and consequently the desired guiding of radiation within the core. Suitable materials from which the core and sheath may be constructed include the above mentioned transparent plastics materials, and these may be selected for the core and sheath on the basis of differences in their known refractive index. For example suitable combinations of sheath and core materials are; sheath polyamide – core polyamide, polymethylmethacrylate, polycarbonate, polyethyleneterephthalate or polybutyleneterephthalate; sheath polymethylmethacrylate – core polyamide, polymethylmethacrylate, polycarbonate, polyethyleneterephthalate or polybutyleneterephthalate; sheath polycarbonate – core polyamide, polymethylmethacrylate, polycarbonate, polyethyleneterephthalate or polybutyleneterephthalate; sheath polyethyleneterephthalate – core polyamide, polymethylmethacrylate, polycarbonate, polyethyleneterephthalate or polybutyleneterephthalate; sheath polybutyleneterephthalate – core polyamide, polymethylmethacrylate, polycarbonate, polyethyleneterephthalate or

polybutyleneterephthalate. From this list it is seen that polymers which are chemically similar but which are of for example different grades so as to have differing refractive indexes N2, N1 being greater than N2 may be used.

One example of such a combination is a core material is a PMMA, typically
5 of refractive index N1 of ca. 1.7 combined with a sheath material which is a PET, typically of refractive index N2 of ca. 1.54.

In a preferred construction the sheath may comprise a monolithic body of the transparent material which forms the principal structure of the toothbrush head, e.g. the structure into which the bristles are fixed. Alternatively the core(s) and sheath
10 may themselves be encased within the toothbrush head, for example being encased within a material which comprises the structure of the toothbrush head.

Additionally the core(s), and or the head itself may be coated, either wholly or partially, with a reflective coating, e.g. a thin reflective metal layer, so as to reflect incident radiation passing in the longitudinal direction along the head into the
15 bristle direction.

Such a reflective layer may comprise the principal cause of internal reflection within the core. Therefore in a third embodiment of this invention the head of the toothbrush comprises one or more cores of a material which is transparent to the incident and/or emitted radiation, which may guide radiation
20 transmitted internally within it, the core being surrounded by a sheath which is of material which reflects the incident and/or emitted radiation, such that internal reflection occurs within the core so as to direct incident radiation passing in the longitudinal direction along the head into the bristle direction.

Suitable materials from which the core and sheath may be constructed
25 include the above mentioned transparent plastics materials. Suitable reflective materials include metals, such as a thin shiny layer of a metal such as aluminium or silver etc. in the form of an applied layer or foil applied to the outer surface of the core.

The cores described in the above-mentioned embodiments may direct either
30 incident radiation, or emitted radiation, or both incident and emitted radiation. The core(s) may be shaped so that its/their shape diverts incident and emitted radiation in the above-mentioned manner. For example a surface of the core(s) remote from

WO 00/07482

the handle, or intermediate surfaces located between the end surface of the core remote from the handle and the handle may be curved or may be angled relative to the longitudinal direction and bristle direction so as to reflect, refract or otherwise divert incident radiation passing in the longitudinal direction along the head into the
 5 bristle direction.

The core(s) may have a cross section which is determined experimentally to be sufficient that a useful intensity of incident and emitted radiation may be transmitted along their length. For example the core(s) may have any convenient cross sectional shape, e.g. circular, oval, rectangular with rounded ends or corners
 10 etc. The cross sectional dimensions of the core may be determined by experiment, but for convenience may typically be 5-95 %, e.g. 10 - 50 %, of the cross sectional width and/or thickness of the head.

The core may have a surface which is substantially perpendicular to the bristle direction, so that incident radiation passing along the core may emerge from
 15 the core through this surface and from thence be directed to the tooth surface. Conversely emitted radiation from the tooth surface may enter the core through this surface and may be directed through the core. For example the core(s) may be a generally "L" shaped structure having a limb oriented in the generally longitudinal direction of the head, i.e. perpendicular to the bristle direction, and a limb oriented
 20 in the bristle direction and terminating in a surface which is substantially perpendicular to the bristle direction. The bend of the "L" between the limbs may be curved e.g. in a spherical geometry, or bevelled e.g. to present a surface at 45° to the limbs.

The core(s) may extend through the sheath material so that the core(s) is/are
 25 exposed outside of the toothbrush head so that radiation may pass directly from the core to the tooth surface and vice versa. Alternatively radiation passing into or out of the core may need to pass through the sheath material, or through other parts of the toothbrush head on its way to and from the tooth surface.

The above-mentioned transparent plastics materials from which the
 30 toothbrush head, e.g. the body, sheath and core, may be made can be formed using known techniques of injection moulding, as are well known in the toothbrush art. It is important to maintain transparency in these materials, and if the core and sheath

are formed by injection moulding, then care should be taken to ensure that there is no formation of cloudiness, streaks or bubbles etc. which might interfere with the transmission of radiation through the core or sheath.

5 In a suitable manufacturing process for a toothbrush of the invention having a core, the core may be made first, e.g. by injection moulding. The formed core may then be positioned in a second injection mould cavity defining the shape of the sheath, which may be the monolithic body of the toothbrush head, and then the sheath may be moulded around the core by a second injection moulding process in this second cavity. In this last mentioned procedure care should be taken that the
10 sheath and core materials have identical or similar shrinking values as they cool after the injection moulding process to ensure that no cracks form due to differential contraction.

Accordingly the invention also provides an injection moulding process in which a toothbrush head or a core for a toothbrush head, as described above are
15 made.

Accordingly the invention also provides an injection mould suitable for use in such an injection moulding process.

A reflective metal layer may be in the form of a foil which can be attached to a pre-formed head or core component during the manufacturing process. If for
20 example such a reflective metal layer is attached to a pre-formed core, around which the head or a sheath is formed by a subsequent injection moulding step, care should be taken to ensure that the metal layer does not become loosened, detached or distorted during the moulding formation of the head material. Alternatively other known deposition technologies may be used to deposit such a metallic layer.

25 In a preferred embodiment of the invention one or more thin radiation-guiding filaments made of a material which is transparent to the incident and/or emitted radiation, e.g. at the wavelength ranges referred to above, e.g. optical fibres may be used to guide radiation from the toothbrush head to the tooth surface and in the reverse direction. Such filaments may typically have a cross section of
30 ca. 0.25 mm. In one form of this embodiment one or more of the toothbrush bristles may comprise such (a) radiation guiding filament(s), toothbrush bristles typically having a cross section of 0.12 - 0.25 mm. Suitable materials from which such

filaments may be made are known, and include the plastics materials referred to above. Although such filaments may be made of single materials, such as are typically used for toothbrush bristles, it is preferred for the function of radiation guiding that the filaments should comprise an inner core of a material transparent to the incident and/or emitted radiation enclosed within a sheath, i.e. an enclosing layer, with the properties of the core and sheath being such that internal reflection occurs within the core to guide the radiation along the sheath. For example the core and sheath of the filament may be materials which are both transparent to the radiation, and the core may have a lower refractive index than the sheath, in a manner similar to that described above, such that internal reflection occurs as a result of the difference in refractive index between the core and sheath to direct radiation within the core. Suitable combinations of transparent materials for the filament core and sheath are as described above. Methods are known for making filaments in the form of a core and sheath are known, for example in WO97/14830 and in PCT/EP98/00718 where the inner core may be a soft elastomer and the sheath may be a harder plastic material. Alternatively the filament core may be transparent and the sheath may be a reflective material such as a shiny metal layer, which may be applied by known deposition techniques.

When one or more filaments such as bristles are used in this way it is necessary that a good optical connection is made between the head and the filament(s). Such a connection may be made between the filaments and e.g. the sheath material of the head, e.g. a monolithic structural material, or a core within the head. This may be accomplished in a number of ways.

If radiation guiding filaments such as bristles are used in this way it is preferred that the ends of the bristles which are fixed into the toothbrush head are fixed into the toothbrush head in a manner which allows radiation to pass from the toothbrush head or core(s) within the toothbrush head into the bristles and vice versa. For example the bristles may be fixed into the head by means of a process of welding, or by fixing into a bed of a liquid hardenable substance, so that a good optical connection is made between the head and the bristle. Suitable processes to achieve this are known in the state of the art, for example WO 95/31917 and WO 97/39649. In such a welding process the ends of individual bristles or bundles of

bristles which are to be fixed into the toothbrush head may be thermally fused so that a "mushroom head" is formed in the toothbrush head. Furthermore if the mushroom head is formed in this way care should be taken that the mushroom head and/or the adjacent ends of the bristles do not become opaque or translucent but
 5 remain transparent to the exciting radiation and/or emitted fluorescence radiation. Some such known processes, e.g. that of WO 97/39649 may enable bristles to be fixed into the head with fixed ends which have end surfaces which are generally perpendicular to the length direction of the bristles, facilitating transmission of light from the head material to the bristles.

10 Alternatively the toothbrush bristles may alternatively be fixed into the toothbrush head in the conventional manner in which a number of bristles folded in two lengthwise then a small metal clip or "anchor" is fastened around the bundle so formed, and the clip is jammed into a fixing hole in the toothbrush head. In this case it may be necessary to cut, polish or grind the region of the fold so that a good
 15 optical connection is made between the head and the bristle.

If however bristles are present on the head of the toothbrush of the invention which are not used for radiation guiding but simply perform the conventional function of cleaning the teeth, these may be fixed to the head by known techniques, without the need for optical connection to the head.

20 In one preferred construction the above-mentioned light guiding filaments are optically connected to the above-mentioned core(s), for example being fixed onto or into the core. For example the core may be made of the above described transparent plastic material having a surface facing in the bristle direction, and the ends of the filaments may be fixed onto or into this surface. For example the
 25 surface of the core may be constructed to mate closely with the ends of the filaments and these ends may be bonded into optical, e.g. physical, contact with the surface of the core. Preferably however the ends of the bristles are fixed into the core by embedding the ends into the core material whilst this is in a soft fluid state and allowing the core material to subsequently harden. This may be achieved for
 30 example with a core made of a plastic material that can be moulded into shape in a fluid form, e.g. a thermoplastic plastic, and the fluid plastic material of the core is allowed to flow around the ends of the bristles (whilst holding them in a suitable

WO 00/07482

configuration) and then solidify. If this is done with the plastic material of the core in a hot fluid state, the bristle material may also fuse with the core material to form a very intimate bond between the bristles and the core. Techniques, e.g. of injection moulding for fusing filaments suitable for toothbrush bristles into thermoplastic materials are well known in the art. For example if the core(s) is/are of the generally "L" shape described above the filaments may be fixed to or into the surface which is substantially perpendicular to the bristle direction, e.g. the end of a limb of an "L" shaped core which points in the bristle direction.

Such radiation guiding filaments may be bundled together into tufts each including a plurality of such filaments. One or more tufts may be connected to each core. Such tufts may be circular in cross section, e.g. corresponding approximately to the cross section of conventional toothbrush cleaning bristle tufts, or alternatively the cross section of the tuft may correspond to that of a non circular cross sectioned core.

Additionally or alternatively the toothbrush head may be provided with other radiation guides to guide radiation to and from the tooth surface to the toothbrush head. For example the bristle surface may be provided with one or more bristle free areas which function as windows for radiation passing to and from the tooth surface to the toothbrush head. For example additionally or alternatively the toothbrush head may be provided with lenses for radiation passing to and from the tooth surface to the toothbrush head which focus emitted radiation from the toothbrush head onto the tooth surface and/or which focus or collect emitted radiation from the tooth surface toward the above-mentioned radiation guiding means or the above-mentioned core.

Suitable materials for such radiation guides, lenses, windows etc. are transparent materials which are transparent to the incident and/or emitted radiation include known transparent plastic materials, such as those referred to above. If the bristles of the toothbrush are to be used as radiation guides then these should be made of fibre materials which are sufficiently transparent to the incident and/or emitted radiation of interest.

Suitably in the toothbrush for which the head of this invention is intended the incident radiation may be of a wavelength known from the state of the art

referred to above which excites fluorescence emission from biological deposits on tooth surfaces, and/or from deposit-free tooth surfaces, and the emitted radiation may be of a wavelength known from the state of the art to correspond to fluorescence emission from such surfaces. Suitably the incident radiation may have
5 a wavelength between 430 and 500 nm and the emitted radiation may have a wavelength above 520 nm. Although incident radiation of wavelength below 430 nm may be more effective at exciting fluorescence emission from biological deposits or tooth surfaces than higher wavelength radiation, this lower wavelength radiation may be harmful to mouth tissues.

10 The toothbrush for which the head of this invention is intended is also provided with means to generate incident radiation and to direct this incident radiation toward the surface of a tooth. This may comprise a suitable radiation source, for example a light emitting diode of known type. The means to associate the emitted radiation with the presence of biological deposits on the tooth may
15 comprise a conventional detector e.g. a semiconductor photodiode. It may be appropriate to incorporate optical filters, e.g. dichroic mirrors, into the optical path between the detector and the test tooth surface to ensure that emitted radiation of a suitable wavelength is preferentially received by the detector. These means, and an appropriate power supply, electronic processing devices, and means to signal the
20 presence and/or absence of biological deposits on a tooth surface may conveniently be provided within the handle of the toothbrush. Suitable means for these purposes will be apparent to those skilled in the art, and are disclosed in the state of the art.

Conveniently the head of the toothbrush of the invention may be made detachable from the handle of the toothbrush for which it is intended. This is
25 particularly convenient if the handle, as described above, includes the radiation source etc., so that the head can be replaced when for example its bristles become worn out without the need to also replace these relatively expensive electrical components. If the head of the toothbrush is detachable from the handle the joint between the head and handle should comprise an optical connector.

30 In a further aspect the present invention also provides a toothbrush provided with a head as described above.

Such a toothbrush may comprise a handle by which it may be held, and having a head from a bristle surface of which a cluster of bristles extends in a bristle direction, the head and handle being disposed along a longitudinal axis, the toothbrush being provided with means to generate incident radiation and to direct
5 this incident radiation toward the surface of a tooth, and being provided with means to collect emitted radiation from the surface of the tooth and to associate this emitted radiation with the presence of biological deposits on the tooth,

characterised in that the means to direct incident radiation toward the surface of a tooth, and/or the means to collect emitted radiation from the surface of the
10 tooth comprise that the head is as described above.

The toothbrush head and toothbrush of the present invention is particularly suited for use with or as the device and method disclosed in GB 9810471.4 filed on 16 May 1998, and internationally filed as PCT/GB99/03273 the contents of which are included herein by way of reference. The device disclosed therein is for
15 detecting biological deposits on the surface of a tooth, and comprises;

illumination means to direct exciting radiation onto a test tooth surface,
detection means to detect fluorescence emission from the test tooth surface at a wavelength associated with that of auto fluorescence emission from a substantially biological deposit- free tooth surface,
20 means to make a comparison of the intensity of the said fluorescence emission from the test tooth surface with an intensity of auto fluorescence emission, at a wavelength associated with that of auto fluorescence emission from a substantially biological deposit free tooth surface, from a tooth surface known to have less biological deposit thereon than is present at the test tooth surface,
25 means to associate the comparison thus obtained with the presence of biological deposits on the test tooth surface, and,
indicator means to indicate the presence of such biological deposits to a user of the device.

The toothbrush head, toothbrush, processes and moulds of this invention will
30 now be described by way of example only with reference to the accompanying figures, of which:

Figs. 1 to 9 show longitudinal sections through heads of toothbrushes of this invention.

Figs. 10A, 10B, 10C, 10D and 10E show cross sections through bundles of bristles of the toothbrush of this invention being used as radiation guides.

5 Figs. 11 and 12 show further toothbrush heads of this invention.

Figs. 13 - 16 schematically show a process by which toothbrush heads of this invention may be manufactured.

Fig. 16 shows a schematic longitudinal section through a handle of a toothbrush of this invention.

10 Referring to Fig. 1 a toothbrush head 1 is shown. The head is detachably connectable to a handle (not shown) by means of connector means 2, which may be conventional in the art. The head 1 and the toothbrush handle are disposed along a longitudinal axis A--A. From a bristle surface 3 of the head 1 extends a cluster of bristles 4, extending in a bristle direction B--B. The head 1 is made of a mass of
15 plastic material which is transparent to radiation in the wavelength region at least between 400-600 nm. The ends 4A of the bristles 4 which are fixed into the head 1 are welded into the head 1 material as individual filaments by a state of the art process.

Incident radiation may be directed from a source (not shown in Fig. 1) into
20 the head 1 from the direction of the handle, i.e. in the direction shown by the arrow 5, by means of an optical connection surface 6, being a planar surface of the transparent material of which the head 1 is made. Because of internal reflection within the transparent head resulting from the difference in refractive index between the high refractive index N_1 of the head material and the lower refractive index N_2
25 of the surrounding air, this radiation is directed through the head 1 and emerges from the head 1 via the bristle face 3, i.e. substantially in the bristle direction B--B. The radiation emerging from the bristle face 3 impinges upon the surface of a tooth (not shown) and excites fluorescence emission from biological deposits on the tooth surface and/or deposit-free tooth surfaces. This emitted radiation traveling in the
30 direction shown by the arrow 7 passes through the bristle face 3 and is collected by the transparent head 1. As before, internal reflection within the transparent head,

causes the emitted radiation to be directed in the direction toward the handle, i.e. in the direction 7.

Referring to Fig 2, features common in construction with Fig. 1 are numbered correspondingly. In this embodiment an end surface 8 of the head 1 remote from the handle is angled relative to the longitudinal direction A--A and bristle direction B--B so as to reflect incident radiation passing in the longitudinal direction A--A along the head 1 into the bristle direction B--B. This end surface 8 is coated with a reflective coating 9, being a thin reflective metal layer, so as to reflect incident radiation passing in the longitudinal direction along the head into the bristle direction. The coating 9 is a thin reflective metal foil applied to the head material 1 by hot stamping. As in the embodiment of Fig. 1 The radiation emerging from the bristle face 3 impinges upon the surface of a tooth (not shown) and excites fluorescence emission from biological deposits on the tooth surface and/or deposit-free tooth surfaces. This emitted radiation traveling in the direction shown by the arrow 7 passes through the bristle face 3 and is collected by the transparent head 1 and is reflected at the surface 8 along the longitudinal direction A--A toward the handle. As before, internal reflection within the transparent head, causes the emitted radiation to be directed in the direction toward the handle, i.e. in the direction 7A.

Referring to Figs. 3, 4 and 5, features common in construction with Fig. 1 are numbered correspondingly. Within the mass of transparent material of the head 1 are located optical fibres 10, 11, 12, 13 of conventional type.

These fibres 10, 11, 12, 13, direct incident and/or emitted radiation respectively to and from the tooth surface. As shown in Fig. 3 an optical fibre or bundle of optical fibres 10 extends through the surface of the transparent mass 1 in the bristle direction B--B and directs incident radiation to the tooth surface (not shown) in the direction shown by the arrow 5. The mass of transparent material 1 collects emitted radiation, and as described with reference to Figs. 1 and 2 directs this emitted radiation back in the direction of the handle, i.e. the direction shown by arrow 7. Alternatively the mass of transparent material 1 may direct incident radiation to the tooth surface, and the optical fibre(s) 10 extending through the surface of the mass may collect emitted radiation and direct it back toward the handle.

As shown in Figs. 4 and 5, optical fibres or bundles of optical fibres 11, 12, 13 end in the mass of transparent material below the bristle surface, facing in the bristle direction B--B. Incident radiation passing in the direction of the handle consequently passes through a transparent layer or window 14 of the mass after
 5 leaving the end of the fibre(s), and may then reach the tooth surface. Similarly emitted radiation from the tooth surface passes through this transparent layer 14 before reaching the end of the fibre. In Fig. 4 a single fibre or bundle 11 is used to direct radiation from the direction of the handle toward the tooth surface, and the transparent mass of head material 1 collects the emitted radiation, or vice versa. In
 10 Fig. 5 two fibres or bundles are used, one to direct incident radiation toward the tooth surface and the other to collect emitted radiation and direct it toward the handle.

At surface 6 the optical fibres or bundles of fibres 10, 11, 12, 13 ends with a suitable optical connection surface.

15 Referring to Fig 6, features common in construction with Fig. 1 are numbered correspondingly. The head 1 of the toothbrush comprises a core 15 of material which is transparent to the incident and/or emitted radiation, which can guide radiation transmitted internally within it, and having a refractive index N^1 . The core 15 may be made by injection moulding in a first moulding operation, and
 20 then the head 16 may be injection moulded around the core 15, care being taken during this second moulding operation to ensure that the so formed core 15 does not crack, soften, distort or otherwise become distorting to light transmission.

This core 15 extends within the head 1 of the toothbrush in the longitudinal direction A--A. The core 15 is surrounded by a sheath 16 which is also of material
 25 which is transparent to the incident and/or emitted radiation, the sheath having a refractive index N^2 , N^1 being greater than N^2 . Internal reflection occurs as a result of the difference in refractive index between N^1 and N^2 to direct radiation within the core, so that incident radiation passing in the direction 5 and collected emitted radiation passing in the direction 7 are contained within the core 15 and directed
 30 toward the handle. The sheath comprises a mass of material which forms the structure of the toothbrush head and from which the bristles 4 extend.

An end surface 17 of the core remote from the handle is angled relative to the longitudinal direction A--A and bristle direction B--B so as to reflect incident radiation passing in the longitudinal direction along the head into the bristle direction. Additionally the surface 17 may be coated with a reflective coating, being
 5 a thin reflective metal layer, e.g. a foil applied by hot stamping as above, so as to reflect incident radiation passing in the longitudinal direction along the head into the bristle direction. At its end 18 remote from the handle the core 15 ends with a surface which is substantially perpendicular to the bristle direction B--B, so that incident radiation passing along the core in direction 5 may emerge from the core
 10 through this surface and from thence be directed to the tooth surface. Similarly emitted radiation from the tooth surface is collected by the core 15 and directed toward the handle in direction 7. The incident and emitted radiation therefore passes through the layer 14 of transparent material of the head 1. At surface 6 the core ends with a suitable optical connection surface.

15 Referring to Fig. 7, features common in construction with Fig. 1 are numbered correspondingly. A toothbrush head has a core 15 surrounded by a sheath 16, with differing refractive indices, the sheath 16 having a refractive index N^2 , the core 15 having a refractive index N^1 being greater than N^2 , similar in construction and operation to that of Fig. 6. As shown in Fig. 7 there are a number of
 20 intermediate surfaces 19 which are angled relative to the longitudinal direction A--A and the bristle direction B--B so as to reflect incident radiation passing in the longitudinal direction along the head into the bristle direction. These intermediate surfaces 19 may be coated with a reflective coating.

The surface 18 of the core 15 is parallel to the bristle face, and
 25 perpendicular to the bristle direction B--B, and incident radiation and emitted radiation are respectively directed to and collected from the tooth surface through surface 18 and the transparent window layer 14. At surface 6 the core ends with a suitable optical connection surface.

Referring to Fig. 8, features common in construction with Fig. 1 are
 30 numbered correspondingly. A toothbrush head 1 having a core 15 similar in construction and function to that shown in Fig 6 is illustrated. In Fig. 8 the core 15 extends through the sheath material 16 so that the core is exposed at surface 20

outside of the toothbrush head 1 so that radiation may pass directly from the core to the tooth surface and vice versa. Additionally the toothbrush head 1 is provided with a bristle free area 21 which functions as a window for radiation passing to and from the tooth surface to the toothbrush head 1 into the core 15. At surface 6 the
 5 core ends with a suitable optical connection surface.

Referring to Fig. 9, features common in construction with Fig. 1 are numbered correspondingly. A toothbrush head 1 having a core 15 similar in construction and function to that shown in Fig. 6 is illustrated. In Fig. 9 the toothbrush head 1 is provided with a bristle free area 21 which functions as a
 10 window for radiation passing to and from the tooth surface to the toothbrush head 1 into the core 15. Additionally a lens 22 of transparent material is provided in the optical pathway between the end 18 of the core 15 and the tooth surface. This lens 22 focuses incident radiation emerging from surface 18 toward the tooth surface, and also assists the collection of emitted radiation from the tooth surface and the
 15 directing of this emitted radiation along core 15 toward the handle of the toothbrush. At surface 6 the core ends with a suitable optical connection surface.

Referring to Figs. 10A, 10B, 10C, 10D and 10E constructions of bundles of bristles for a toothbrush head of this invention are shown in more detail.

In Fig. 10A a bundle of bristle fibres 4, made of a fibre material which is transparent to incident radiation, has been fixed into the material of a toothbrush
 20 head 1 so that they extend from the bristle face 3 by means of a state of the art welding process which has melted the ends of the bundle of bristles 4 into a mass 101, which is itself fused with the material of the head 1. The fused mass 101 enables incident radiation to pass in the direction 5 from the head 1 material into the
 25 bristles 4, and emitted radiation to be collected in the opposite direction. The fused mass 101 may be shaped into a lens shape to assist in guiding radiation into and out of the bristles 4. In Fig. 10B an analogous situation is shown in which a single bristle or "monofilament" bristle is fixed into the toothbrush head, for example using a process as disclosed in WO 97/39649, and the end 101 of a single such
 30 bristle is fused into a lens shape.

In Figs. 10C and 10D bristles 4 are fixed into the toothbrush head 1 in the conventional manner by folding each bristle 4 in two and fastening a small metal

clip or "anchor" 102 around the folded bristles near the fold. The anchor is then jammed into a fixing hole 103 in the bristle face. In Figs. 10C and 10D only one of the bristles included in the bristle bundle is shown. As shown in Fig. 10C it is difficult for incident radiation and emitted radiation to pass in their respective
5 directions 5 and 7 between the head 1 material and the bristle 4. In Fig. 10D the region 104 of the outside bend of the fold has been polished or ground, thereby creating a flat surface which facilitates transmission of incident and emitted radiation between the head 1 and bristles 4.

Referring to Fig. 10E a filament 4 is shown which comprises a core 105
10 made of a transparent plastic material, surrounded by a sheath 106 also of a transparent plastic material with a lower refractive index than that of the core 105. Alternatively the sheath 38 may be thin coating of a shiny metal, e.g. 2-3 microns thick. In such a filament internal reflection contains and guides radiation within and along the length of the filament. The filament 4 of Fig. 10E may form one of the
15 filaments 4 of Fig. 10A or 10B, and may be used as a cleaning bristle.

Referring to Figs. 11 and 12, two further forms of toothbrush head of this invention are shown. Parts in common with other toothbrush heads of the invention as shown in preceding figures are numbered correspondingly. In Figs 12 and 13 the toothbrush head 1 is made of a monolithic body of transparent plastic material,
20 being polyethylene-terephthalate of refractive index 1.54. Within this head, in Fig. 11 is a single core 111, and in Fig. 13 two cores 112, being respectively as shown in Figs 11A and 12A of rectangular with rounded ends cross section (dimensions approximately 1.7 x 3.4 mm), and circular cross section. The cores 111, 112 are made of a transparent plastic material being polymethylmethacrylate of refractive
25 index 1.71. In each of the toothbrush heads of Figs 11 and 12 the cores 111 and 112 are a generally "L" shaped structure having a limb oriented in the generally longitudinal direction A-A of the head, i.e. perpendicular to the bristle direction, and a limb oriented in the bristle direction and terminating in a surface 111A, 112A which is substantially perpendicular to the bristle direction. Into the surface 111A,
30 112A are fixed filaments 113. The filaments 113 are filaments of the type described and shown with reference to Fig. 10E, comprising a core and a sheath. The surface 111A, 112A terminates a short distance below the bristle surface 3 of the head 1.

Cleaning bristles 4 are also fixed into head 1. In Fig 11 the tufts of bristles 4 are fixed in by the well known method of fusing their ends with the head material. In Fig. 12 the head 1 is provided with small holes 114 in its bristle face 3 into which bristles 4 (not shown) may be inserted and fixed using known types of small metal anchor.

Fig. 11B shows a plan view of the bristle face 3 of the toothbrush head 1 of Fig. 11, showing the generally rectangular cross section of the single tuft of light guiding filaments 113. Fig. 11C shows a plan view of the bristle face 3 of an alternative construction of the head 1 of Fig. 11, in which two generally circular cross sectioned tufts of light-guiding filaments 113 are fixed into the generally rectangular sectioned core 111. Fig. 12B shows a plan view of the bristle face 3 of the toothbrush head shown in Fig. 12, with one tuft of light-guiding filaments 113 fixed into each of the two cores 112. Fig. 12C shows an alternative construction of the head 1 of Fig. 12, in which the corner 112B between the two limbs of the "L" shaped core 112 is chamfered so as to be at ca. 45° to the alignment of the two limbs.

Referring to Figs. 13, 14, 15 and 16 an injection moulding method and moulds are illustrated by which the toothbrush heads of Figs. 11 and 12 may be made. Referring to Fig. 13, filaments 113 as used in the toothbrush head of Fig. 11 or 12 have been bundled into a bundle corresponding to the tuft 113 and have been inserted into a cavity 131 in part 132 of a two part injection mould. The mould is closed with the second part 133. Fluid polymethylmethacrylate resin is injected, via an injection port (not shown) into the mould cavity. Under the conditions of the injection the ends of the filaments 113 fuse with the resin. When the mould is cooled and opened the result is the structure shown in Fig. 14 being the "L" shaped core 111 or 112 with the embedded filaments 113.

Meanwhile as shown in Fig. 15 cleaning bristles 4 are bundled and inserted into holes 134 in a mould cassette 135. A further hole 136 runs through the cassette 135. The ends of the bristles 4 are melted together by application of a hot surface (not shown) and allowed to cool so they solidify into fused masses 137 projecting from the holes. As shown in Fig. 16 the mould cassette 135 is assembled with parts 138, 139 of a further mould which includes a cavity 140 which defines the shape of

the toothbrush head 1. During the assembly the core 111, 112 and filaments 113 as shown in Fig. 14 are also inserted into hole 136 in the cassette 135, so that the core 111, 112 lies within the cavity 140. Fluid polyethyleneterephthalate is injected into the cavity 140 via an injection port (not shown), with the result that the core 111, 112 and the bristles 4 become embedded in the so-formed toothbrush head 1. The above moulding operation has been described in its essentials, and numerous refinements of the technique are known which optimise such moulding operations.

Referring to Fig 17, a schematic diagram of the handle 171 of the toothbrush of this invention, suitable for use with the toothbrush heads of Figs. 1-12 is shown.

The toothbrush handle 171 is provided with a connector 172 enabling connection with the connectors 2 of the heads of Figs 1-12. The handle 171 includes an incident radiation source 173 being a light emitting diode of known type, for example capable of emitting radiation of a suitable wavelength. The handle 171 also includes a radiation detector 174 being a semiconductor photodiode. The handle 171 also includes a power supply 175, a control 176, electronic processing devices 177, and signaling means 178 to signal the presence and/or absence of biological deposits on a tooth surface, for example a light or buzzer etc. The toothbrush handle 171 also includes a set of dichroic mirrors 179, 180 which reflect incident radiation from source 173, but transmit emitted radiation so that these follow divergent radiation pathways. This enables the emitted radiation to be collected by the detector 174. Although illustrated in Fig. 17 for embodiments having a core 15, 112 corresponding constructions suitable for use with embodiments as in Figs 1-5 having monolithic heads and/or optical fibres will be apparent to those skilled in the art. The respective end surfaces of the handle 171 and a head e.g. as shown in Figs. 1-12 should mate with precision such that there is as little loss of radiation as possible which passes between the head 1 and handle 171.

In use the toothbrush of the invention is used to brush the user's teeth, thereby aligning the bristle face 3 so that it faces the tooth surface at a convenient distance. The control 176 is operated, and incident radiation is directed in the direction 5 from the source 173, being reflected by dichroic mirrors 179, 180 onto a tooth surface using the toothbrush head 1 of this invention, for example via the filaments 113. Fluorescence radiation is emitted from the tooth surface, either from

biological deposits such as plaque or from a deposit-free tooth surface or from both. This emitted radiation is collected by the head 1, e.g. again e.g. via filaments 113 and directed back as described above to the detector 174, being transmitted through the dichroic mirror 180. An electrical signal is generated by the detector 174 and is processed by the processing device 177. The processing device 177 operates the signaling means 178 to indicate to the user the presence or absence of biological deposit.

5

Druckexemplar

Claims

1. A toothbrush head having a bristle surface from which a cluster of bristles extends in a bristle direction, the head being suitable to direct incident radiation
5 toward a surface of a tooth and to collect emitted radiation from the surface of the tooth, *characterised* in that;
the means to direct incident radiation toward the surface of a tooth, and/or the means to collect emitted radiation from the surface of the tooth comprise one or more cores within the toothbrush head and made of a material which is transparent
10 to the incident and/or emitted radiation, and in which radiation transmitted internally within the core is guided by internal reflection within the core, the core material having a refractive index N^1 and the core being surrounded by a sheath comprising a monolithic body in which the bristles of the head are mounted, and which is also of material which is transparent to the incident and/or emitted
15 radiation, the sheath having a refractive index N^2 , N^1 being greater than N^2 , such that internal reflection occurs as a result of the difference in refractive index between N^1 and N^2 , and/or the core is surrounded by a sheath which is of a reflective material which reflects the incident and/or emitted radiation.
- 20 2. A toothbrush head according to claim 1 *characterised* in that the material which is transparent to the incident and/or emitted radiation is transparent over the wavelength range 400 – 630nm.
3. A toothbrush according to claim 1 or 2 *characterised* in that the transparent
25 material is a transparent plastics materials.
4. A toothbrush head according to claim 1 *characterised* in that the reflective material is a metal.
- 30 5. A toothbrush head according to any preceding claim *characterised* in that the head of the toothbrush is made of a monolithic body of a material which is transparent to the incident and/or emitted radiation and may thus guide radiation

transmitted internally within it and is coated, either wholly or partially, with a reflective coating.

6. A toothbrush head according to any preceding claim *characterised* in that the head incorporates one or more optical fibres to direct incident and/or emitted radiation respectively to and from the tooth surface.

7. A toothbrush head according to any one of the preceding claims *characterised* in that the core material is a polymethylmethacrylate and the sheath material is polyethyleneterephthalate.

8. A toothbrush head according to any one of the preceding claims *characterised* in that the core is a generally "L" shaped structure having a limb oriented in the generally longitudinal direction of the head and a limb oriented generally in the bristle direction and terminating in a surface which is substantially perpendicular to the bristle direction.

9. A toothbrush head according to claim 8 *characterised* in that the bend of the "L" between the limbs is curved or bevelled to present a surface at 45° to the limbs.

10. A toothbrush head according to any one of the preceding claims *characterised* in that the cross-sectional dimension of the core is 5-95% of the cross sectional width and/or thickness of the head.

11. A toothbrush head according to any one of the preceding claims *characterised* in that the core has a surface which is substantially perpendicular to the bristle direction, so that incident radiation passing along the core may emerge from the core through this surface and from thence be directed to the tooth surface and/or emitted radiation from the tooth surface may enter the core through this surface and may be directed through the core, and a layer of transparent head

material is provided at this surface so that incident and emitted radiation passes through this transparent head material.

12. A toothbrush head according to claim 11 *characterised* in that the filament(s) comprise(s) an inner core of a material transparent to the incident and/or emitted radiation enclosed within a sheath with the properties of the core and sheath being such that internal reflection occurs within the core to guide the radiation along the sheath.

13. A toothbrush head according to claim 11 or 12 *characterised* in that the filament(s) is/are optically connected to a core .

14. A toothbrush head according to any preceding claim *characterised* in that the bristle surface is provided with one or more bristle free areas which function as windows for radiation passing to and from the tooth surface to the toothbrush head.

15. A toothbrush head according to any preceding claim *characterised* by having one or more lenses for radiation passing to and from the tooth surface to the toothbrush head which focus emitted radiation from the toothbrush head onto the tooth surface and/or which focus or collect emitted radiation from the tooth surface.


16. A toothbrush having a head as claimed in any one of the preceding claims.

17. An injection moulding process by which a toothbrush head as claimed in any one of the preceding claims is made, *characterised* in that a core is first made, optionally a reflective metal layer is applied to this core, then the core is positioned in an injection mould cavity defining the shape of the monolithic body of the toothbrush head, and then the body is formed around the core by an injection moulding process.

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

| | | | |
|---|--|--|--|
| (51) International Patent Classification ⁷ : A46B 15/00 | | A1 | (11) International Publication Number: WO 00/07482 |
| | | | (43) International Publication Date: 17 February 2000 (17.02.00) |
| (21) International Application Number: PCT/EP99/05582 | | (81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG). | |
| (22) International Filing Date: 2 August 1999 (02.08.99) | | | |
| (30) Priority Data: 9816914.7, 5 August 1998 (05.08.98) GB | | | |
| (71) Applicants (for all designated States except US): SMITHKLINE BEECHAM GMBH & CO. KG [DE/DE]; Hermannstrasse 7, D-77815 Bühl (DE). HELMUT HUND GMBH [DE/DE]; Wilhelm-Will Strasse 7, D-35580 Wetzlar-Nauborn (DE). | | | |
| (72) Inventor; and (75) Inventor/Applicant (for US only): MULLER, Werner [DE/DE]; Helmut Hund GmbH, Wilhelm-Will Strasse 7, D-35580 Wetzlar-Nauborn (DE). | | Published With international search report. | |
| (74) Agent: WALKER, Ralph, Francis; SmithKline Beecham, Two New Horizons Court, Brentford, Middlesex TW8 9EP (GB). | | | |

(54) Title: TOOTHBRUSH

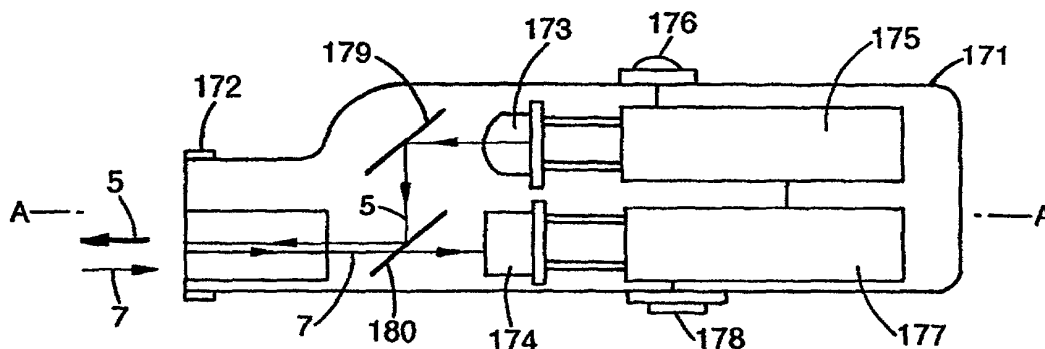

(57) Abstract

A toothbrush head suitable to direct incident radiation toward a surface of a tooth and to collect emitted radiation from the surface of the tooth, being made at least in part of a material which is transparent to the incident and/or emitted radiation. In preferred embodiments the head includes one or more radiation guiding cores of transparent material.

Fig.1.

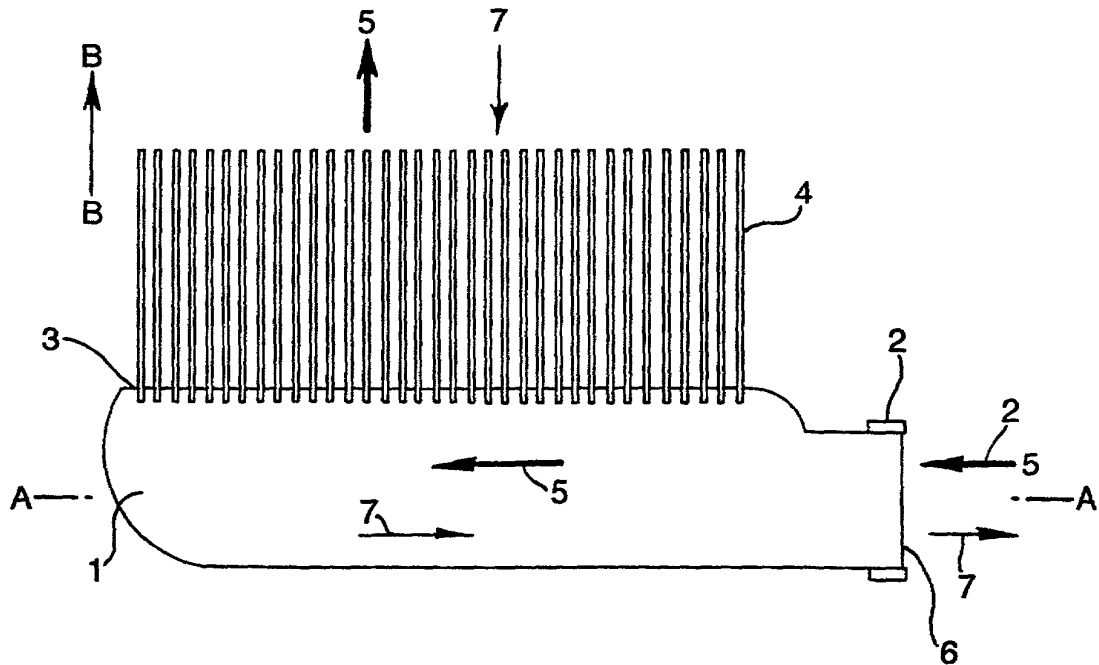


Fig.2.

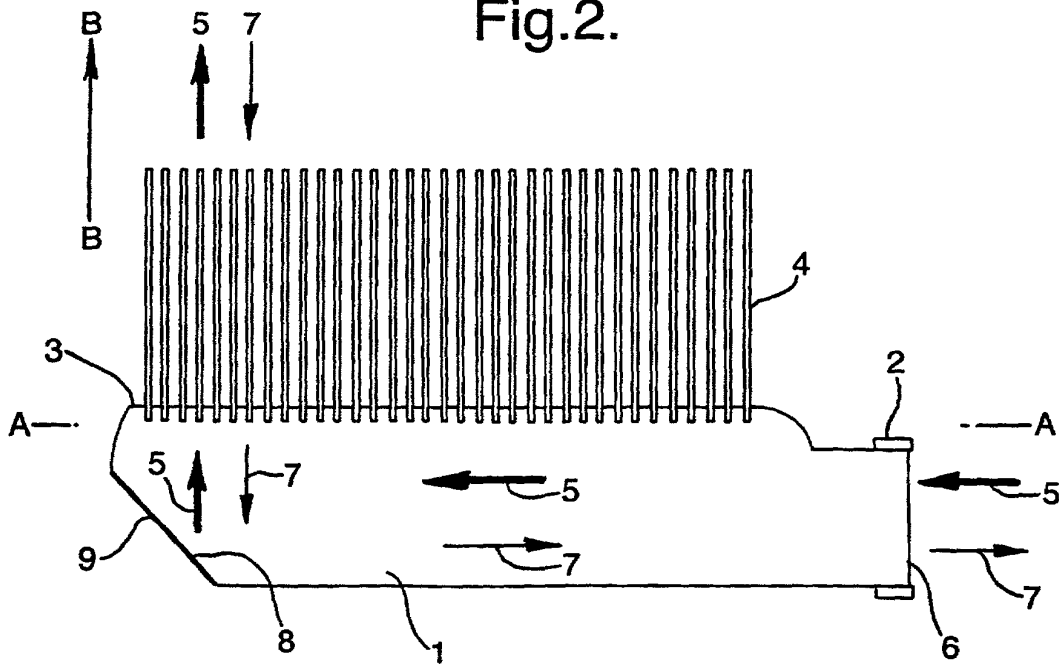


Fig.3.

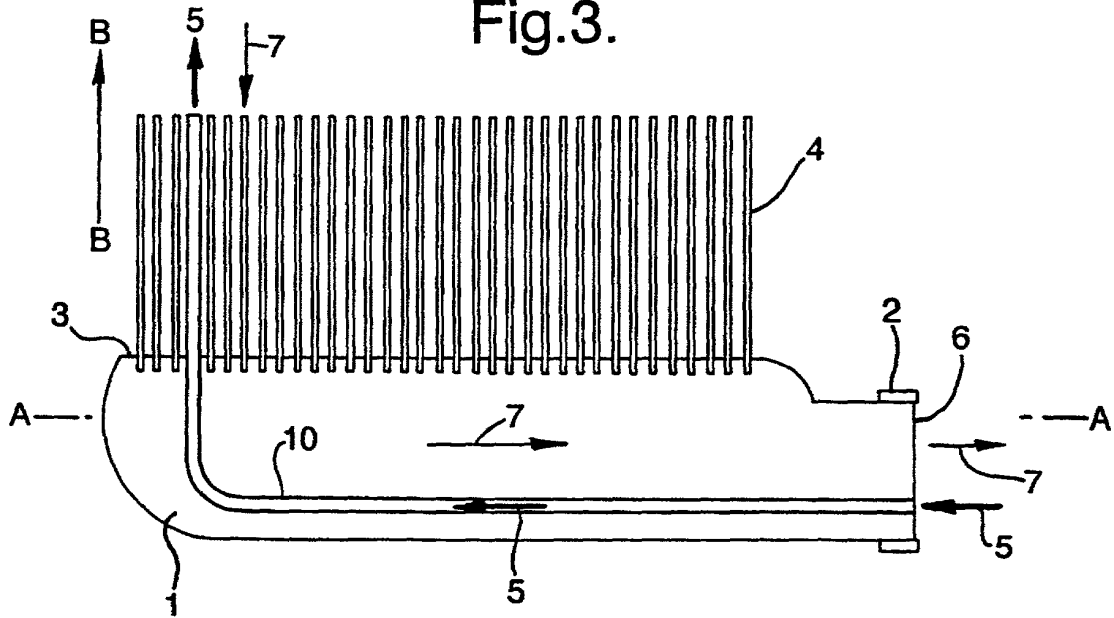


Fig.4.

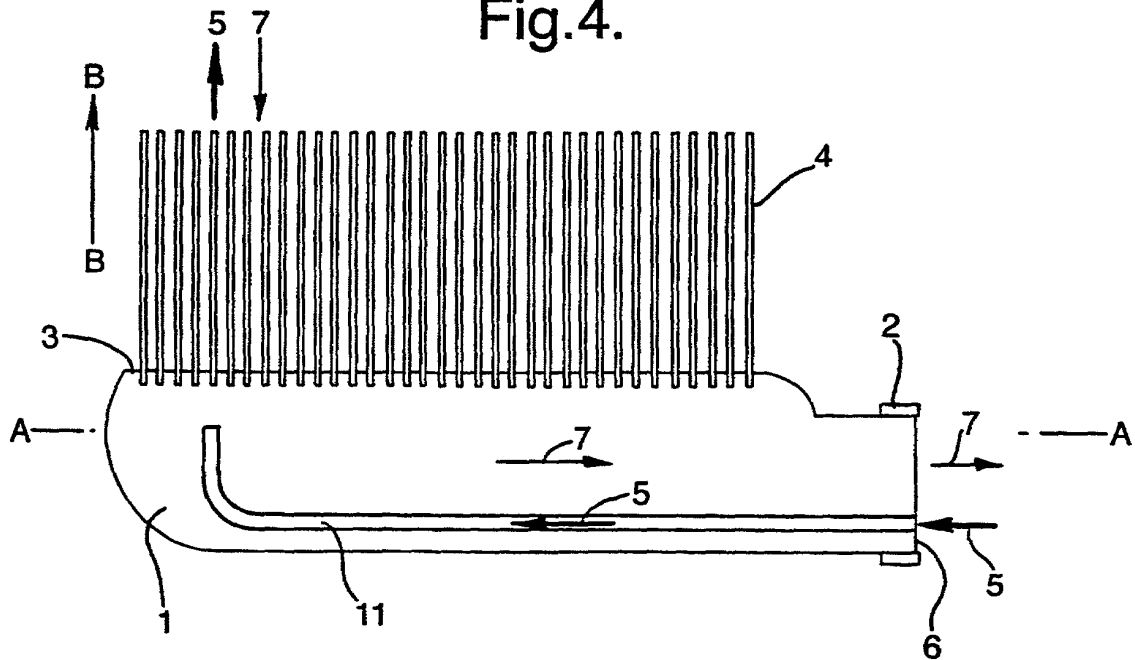


Fig.5.

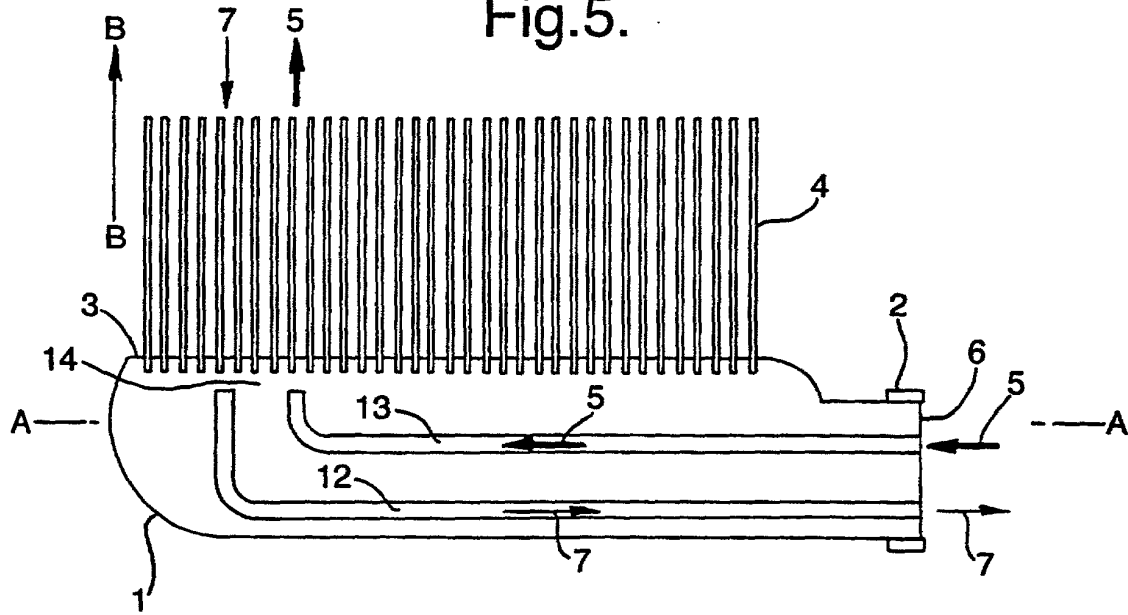


Fig.6.

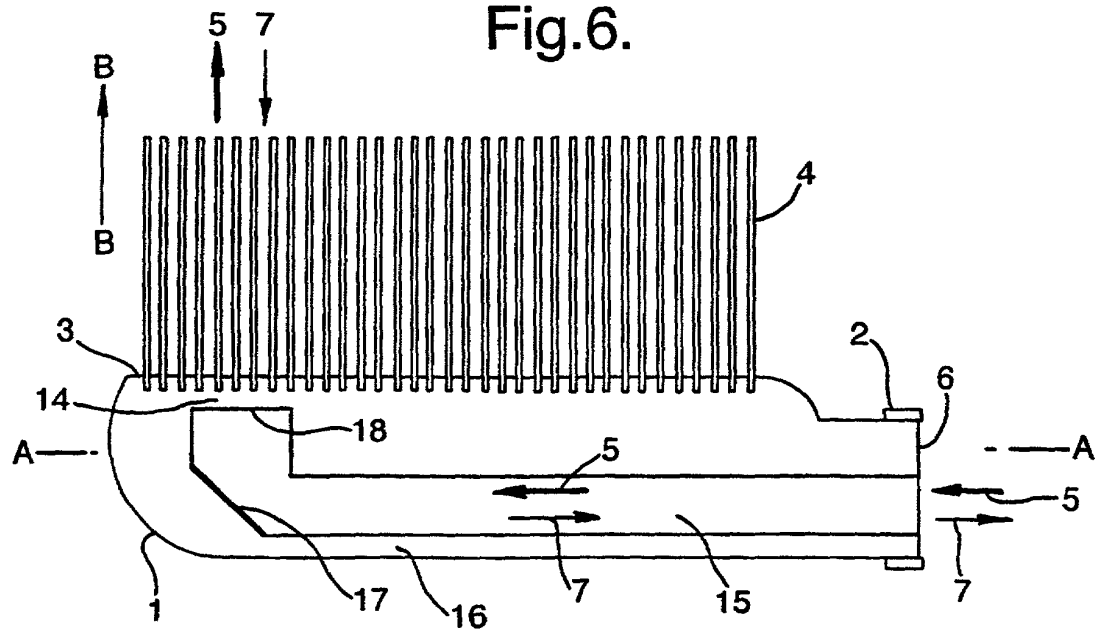


Fig.7.

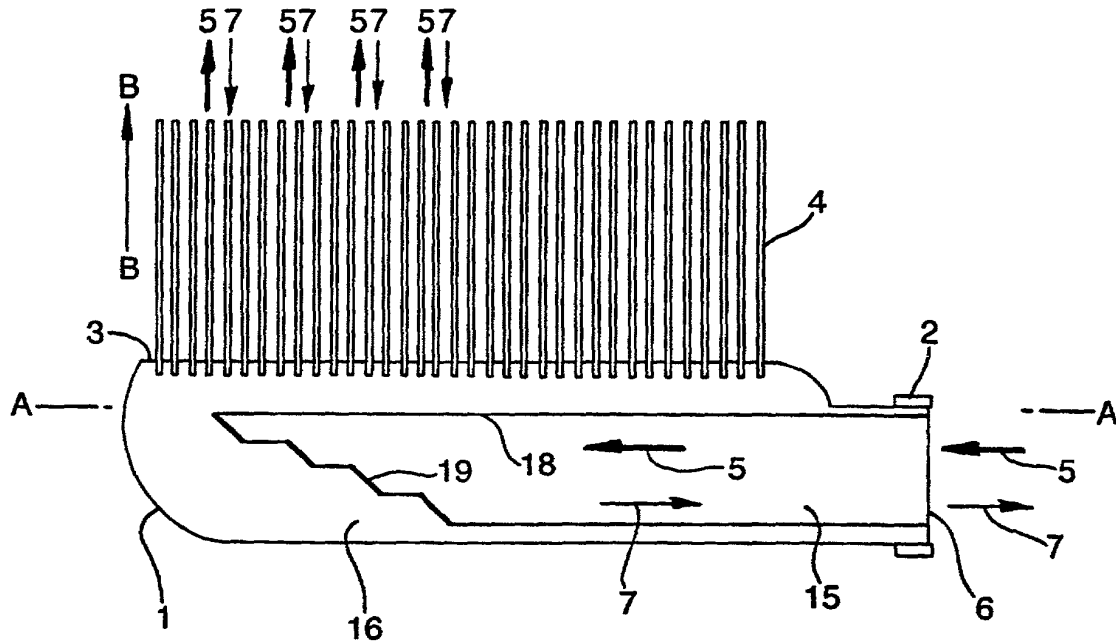


Fig.8.


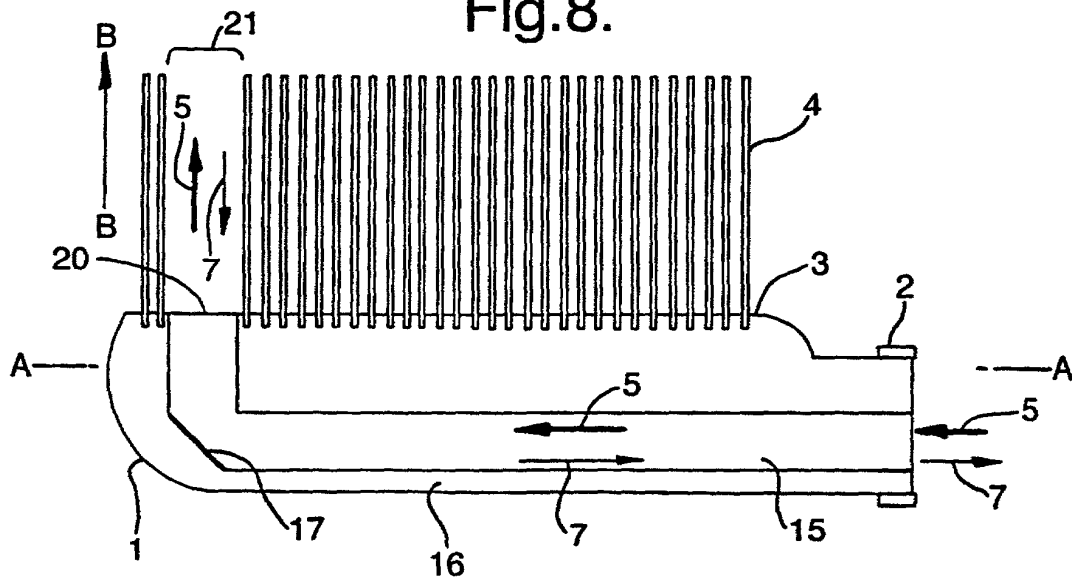


Fig.9.

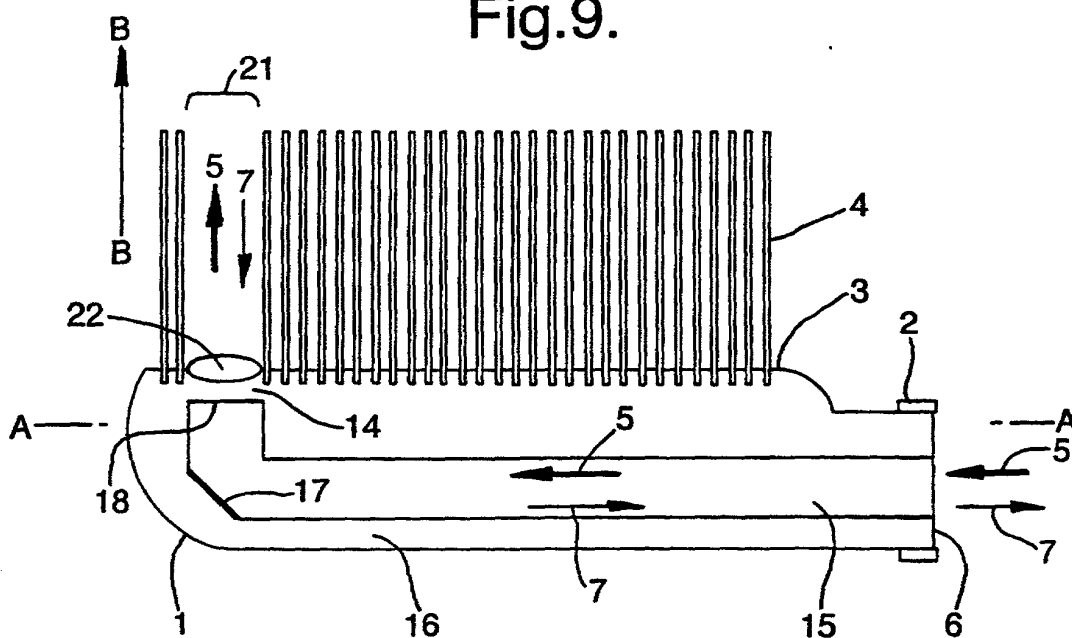

6/10

Fig.10A.

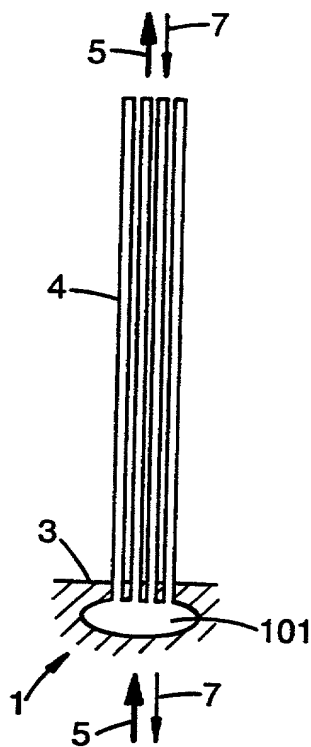


Fig.10B.

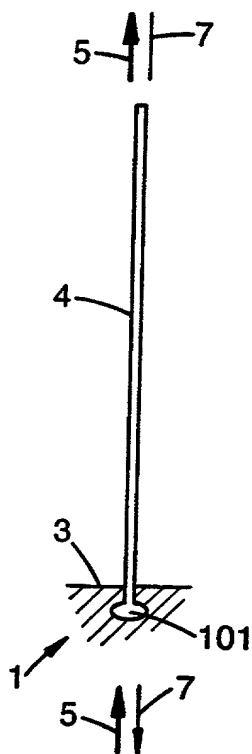


Fig.10C.

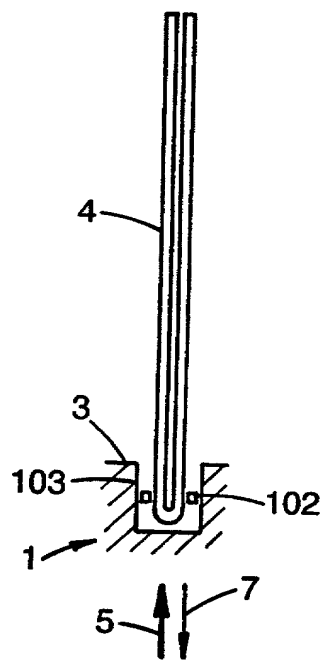


Fig.10D.

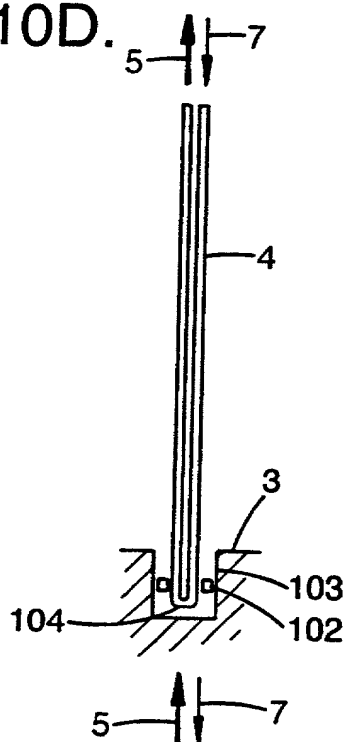


Fig.10E.

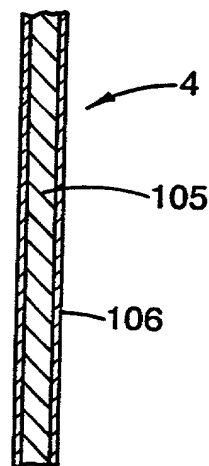


Fig.11.

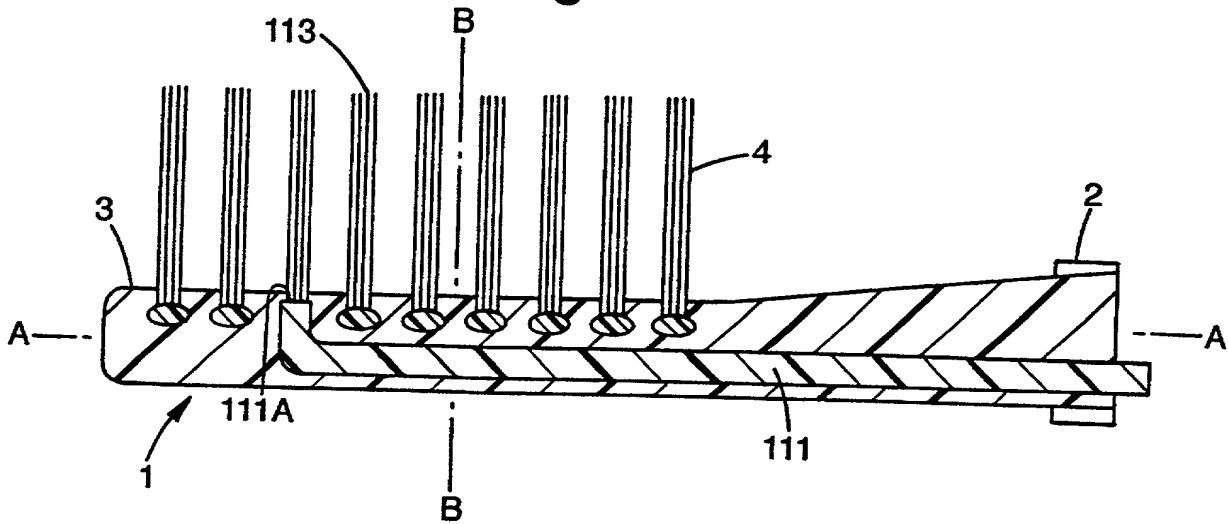


Fig.12.

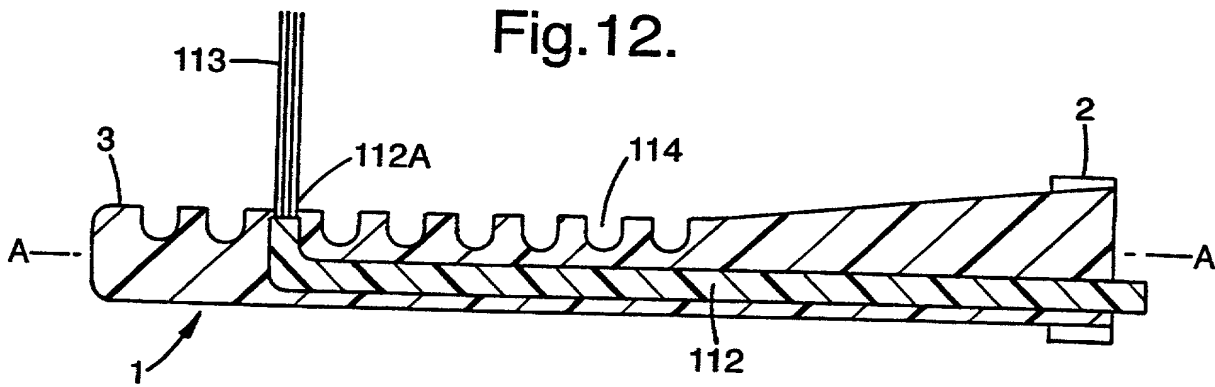


Fig.11A.





Fig.12A.



8/10

Fig.11B.

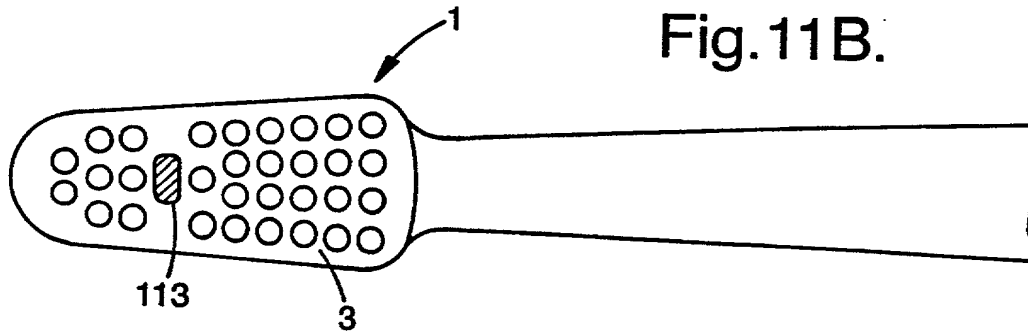


Fig.11C.

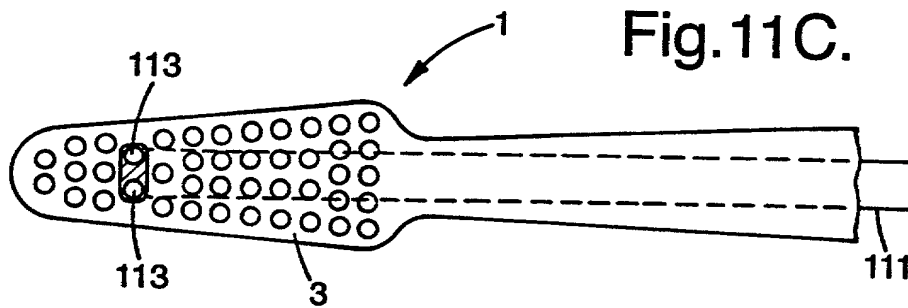


Fig.12B.


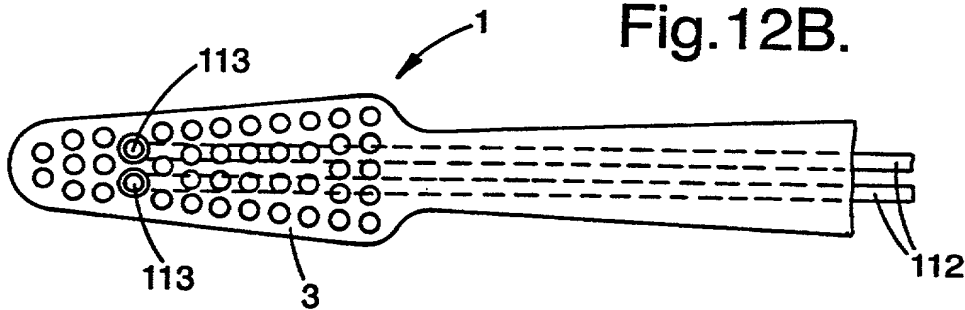


Fig.12C.

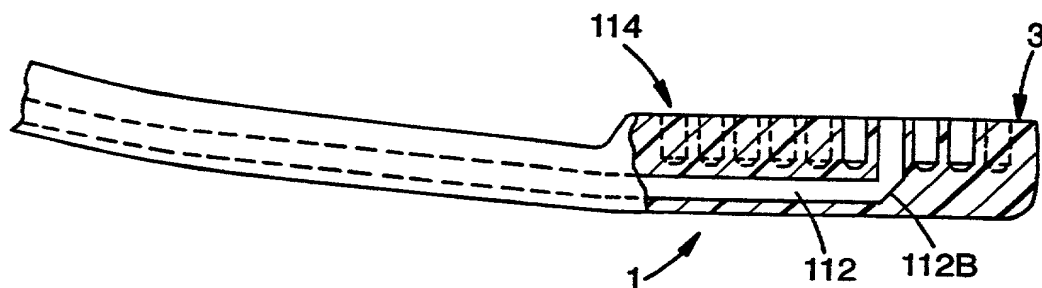

9/10

Fig.13.


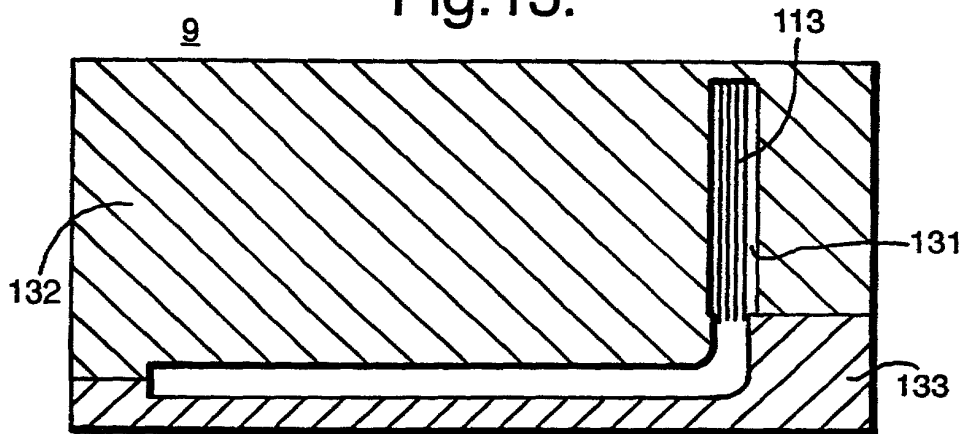


Fig.14.

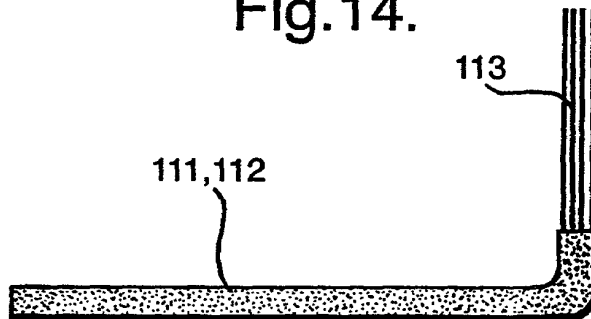

10/10

Fig.15.

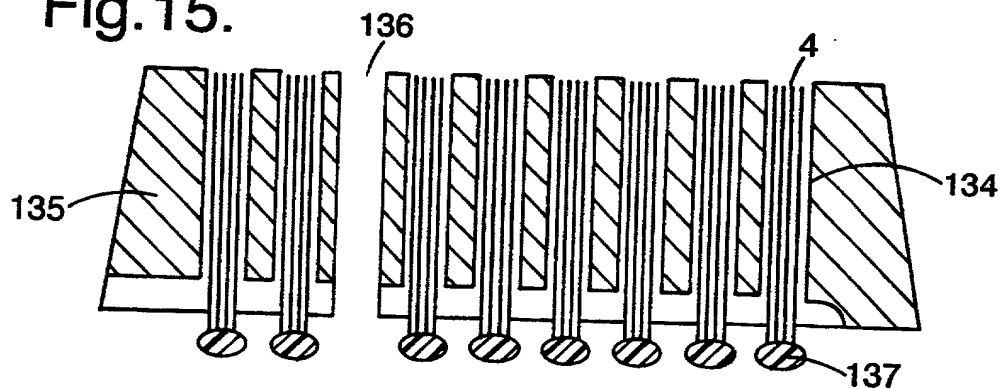


Fig.16.


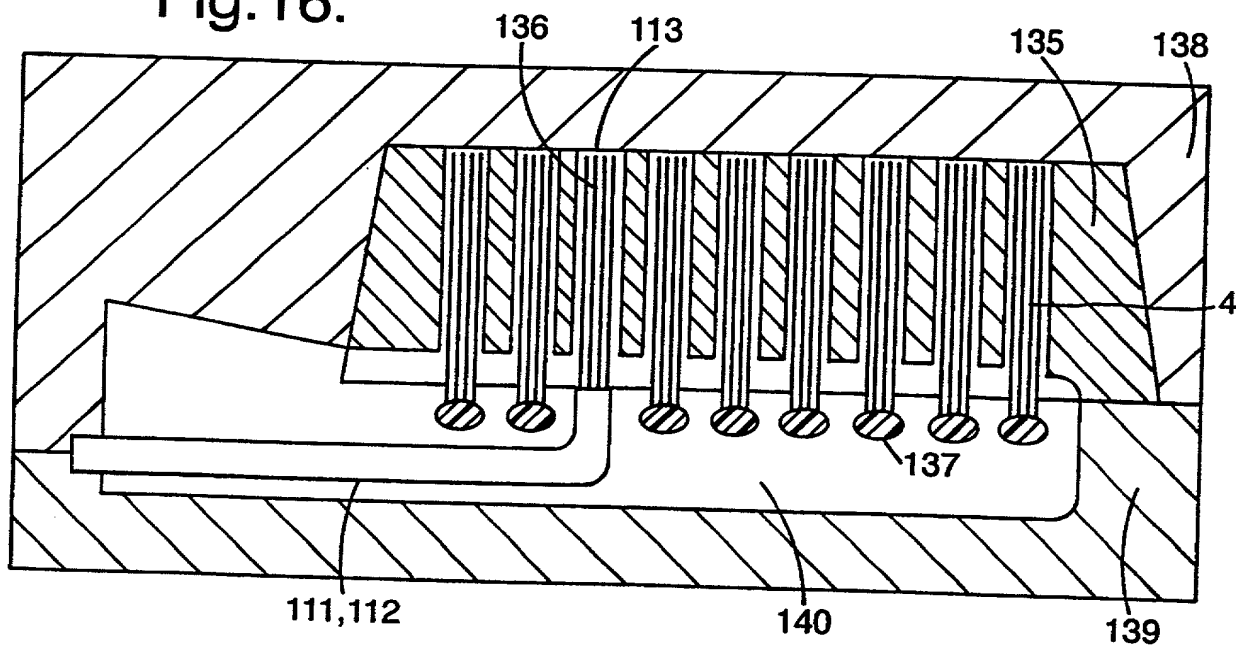


Fig.17.

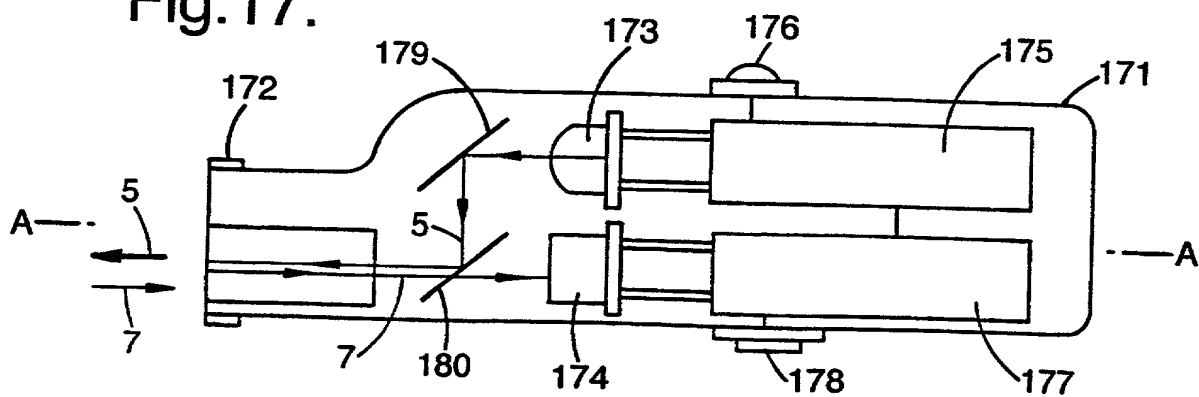

DECLARATION AND POWER OF ATTORNEY

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

TOOTHBRUSH

the specification of which (check one)

☐ is attached hereto.

☒ was filed on 2 August 1999 as Serial No. PCT/EP99/05582
and was amended on (if applicable).

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the patentability as defined in Title 37, Code of Federal Regulations, Section 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, Section 119(a)-(d) or Section 365(b) of any foreign application(s) for patent or inventor's certificate, or Section 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below any foreign application for patent or inventor's certificate, or PCT International application having a filing date before that of the application on which priority is claimed.

| Prior Foreign Application(s) | | | |
|------------------------------|---------------|----------------|------------------|
| Number | Country | Filing Date | Priority Claimed |
| 9816914.7 | Great Britain | 05 August 1998 | Yes |

I hereby claim the benefit under Title 35, United States Code, Section 119(e) of any United States provisional application(s) listed below.

| Application | Filing Date |
|-------------|-------------|
| Number | |

I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States application(s) or Section 365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of Title 35, United States Code, Section 112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application.

| Serial No. | Filing Date | Status |
|------------|-------------|--------|
|------------|-------------|--------|

I hereby appoint the practitioners associated with the Customer Number provided below to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith, and direct that all correspondence be addressed to that Customer Number:

Customer Number 20462.

Address all correspondence and telephone calls to Nora Stein-Fernandez, SmithKline Beecham Corporation, Corporate Intellectual Property-U.S., UW2220, P.O. Box 1539, King of Prussia, Pennsylvania 19406-0939, whose telephone number is 610-270-5044.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full Name of Inventor: Werner MULLER

Inventor's Signature: G. Müller Date: 12.02.01

Residence: Wetzlar-Nauborn, Germany

Citizenship: German

Post Office Address: GlaxoSmithKline
Corporate Intellectual Property - UW2220
P.O. Box 1539
King of Prussia, Pennsylvania 19406-0939